


## Blown Fibre Blowing Unit 3A



Designed to replace the 2A, the 3A is the next generation in blown fibre technology. Incorporating an extremely efficient air delivery system the unit uses less airflow compared to the 2A. As a result this allows the units to blow to the same standard with considerably smaller air compressors, such as the new lightweight Fibrevane 70 range.

Supplied in a tough ABS carry case the 3A comprises the blowing head; controller; battery charger; spare battery; 12, 24V vehicle and 240V charging leads; spare tyres; 5 & 8mm closedown assemblies; recovery air diffuser and 3mm hexagonal head screwdriver.

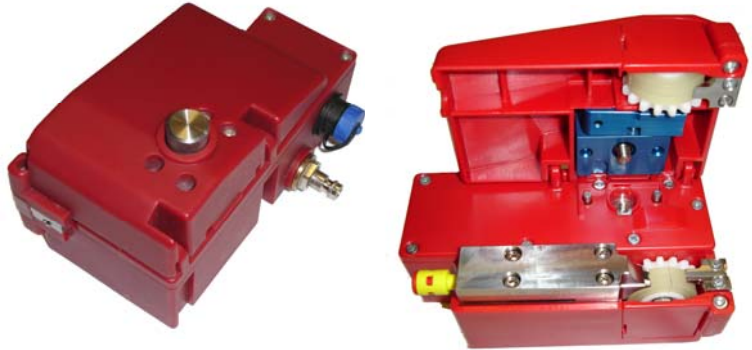

Powered by rechargeable battery pack the new 3A eliminates the need for a separate power supply. The easy to use control unit incorporates a load facility making it much easier to load the blown fibre unit. During the installation the speed will automatically be adjusted depending on the length of the route and the number of bends. If there is insufficient time during the day to complete




an installation the distance and associated forces can be saved allowing you to resume the blow at a later time.

Should you need to recover blown fibre unit from a route the 3A incorporates a fibre recovery feature. Using the additional 820A kit, air is plugged into the far end and the 3A will control the speed of the fibre being recovered from the route.



The 3A blowing head is designed to be mounted on the 18A dispenser. This dispenser can be used in tight congested spaces, such as when centre blowing, by disconnecting the platform from the regulator and gauge section.

## Blown Fibre Blowing Unit 3A

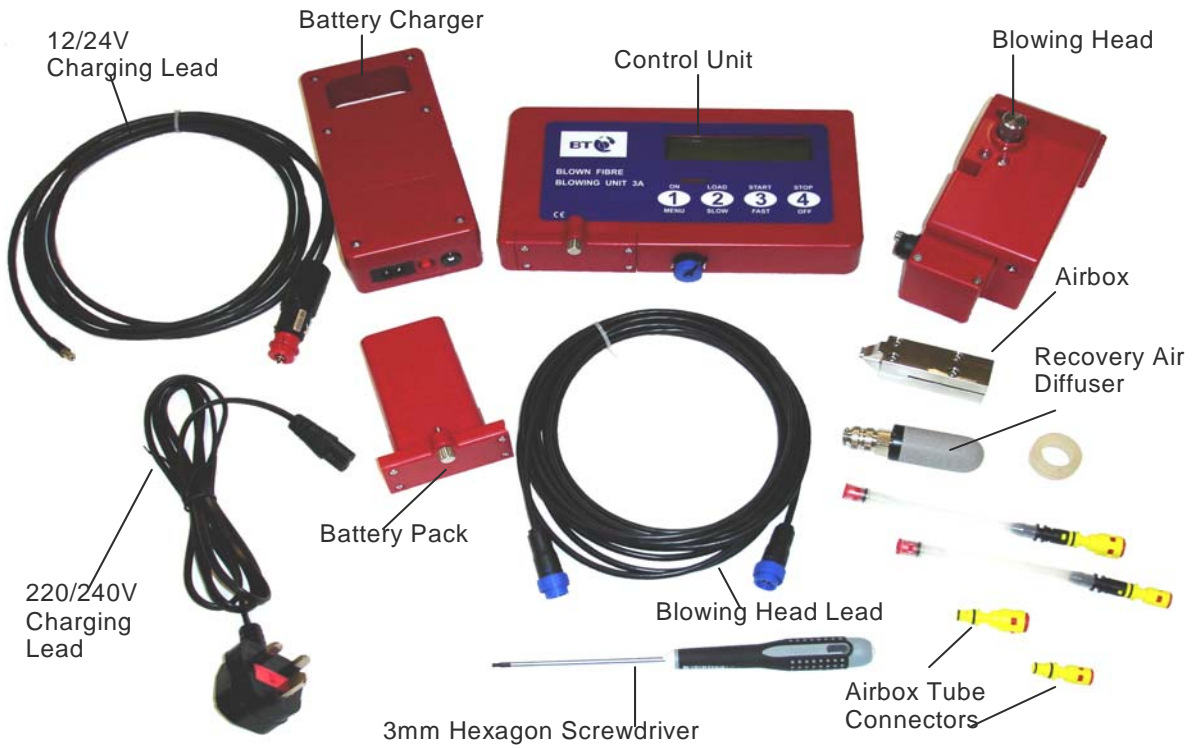

3A Blowing Head mounted on an 18A Dispenser and connected to the Control Unit ready to install blown fibre unit.

Available for BT, their license holders and sub-contractors only.