

factair

Blown Fibre Blowing Unit 4A



The 4A is the next generation in blown fibre technology for installing EPFU – enhanced performance fibre unit. Incorporating an extremely efficient air delivery system the unit is designed to use significantly less airflow compared to other blowing heads. As a result this allows the unit to blow to the same standard with considerably smaller air compressors, such as the petrol engine driven BT9A or Factair's 110/240V Electric Blown Fibre Compressor, which both weigh under 25Kg.

Supplied in a tough Peli carry case the 4A comprises the blowing head; dispenser; controller; battery charger; spare battery; 12, 24V vehicle and 240V charging leads; spare tyres; 5 & 8mm closedown assemblies; recovery air diffuser and 3mm hexagonal head screwdriver.


Powered by rechargeable battery pack the 4A eliminates the need for a separate power supply. The easy to use control unit incorporates a load facility making it much easier to load the blown fibre unit. During the installation the speed will automatically be

adjusted depending on the length of the route and the number of bends. If there is insufficient time during the day to complete an installation the distance and associated forces can be saved allowing you to resume the blow at a later time.

Supplied as standard with an airbox for 4 fibre bundle an alternative 8/12 fibre airbox is also available.



Should you need to recover blown fibre unit from a route the 4A incorporates a fibre recovery feature. Using the additional 820B kit, air is plugged into the far end and the unit will control the speed of the fibre being recovered from the route.

The blowing head is mounted on a compact dispenser which can be used in tight congested spaces, such as when centre blowing.

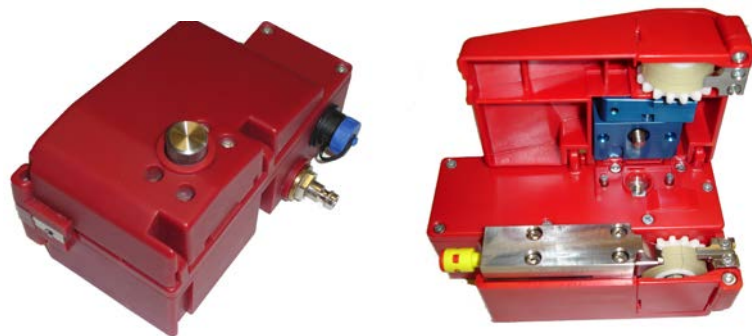

Factair Ltd. 49 Boss Hall Road, Ipswich Suffolk IP1 5BN

Tel Sales: +44 (0) 1473 746400 Fax: +44 (0) 1473 747123 Email: enquiries@factair.co.uk www.factair.co.uk

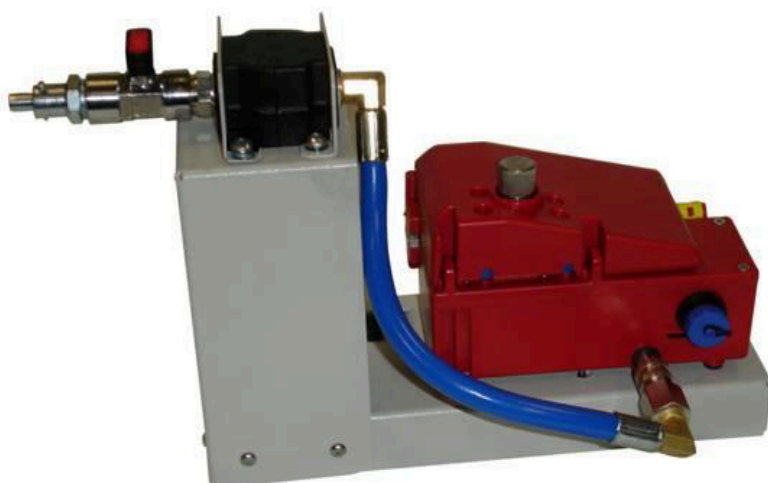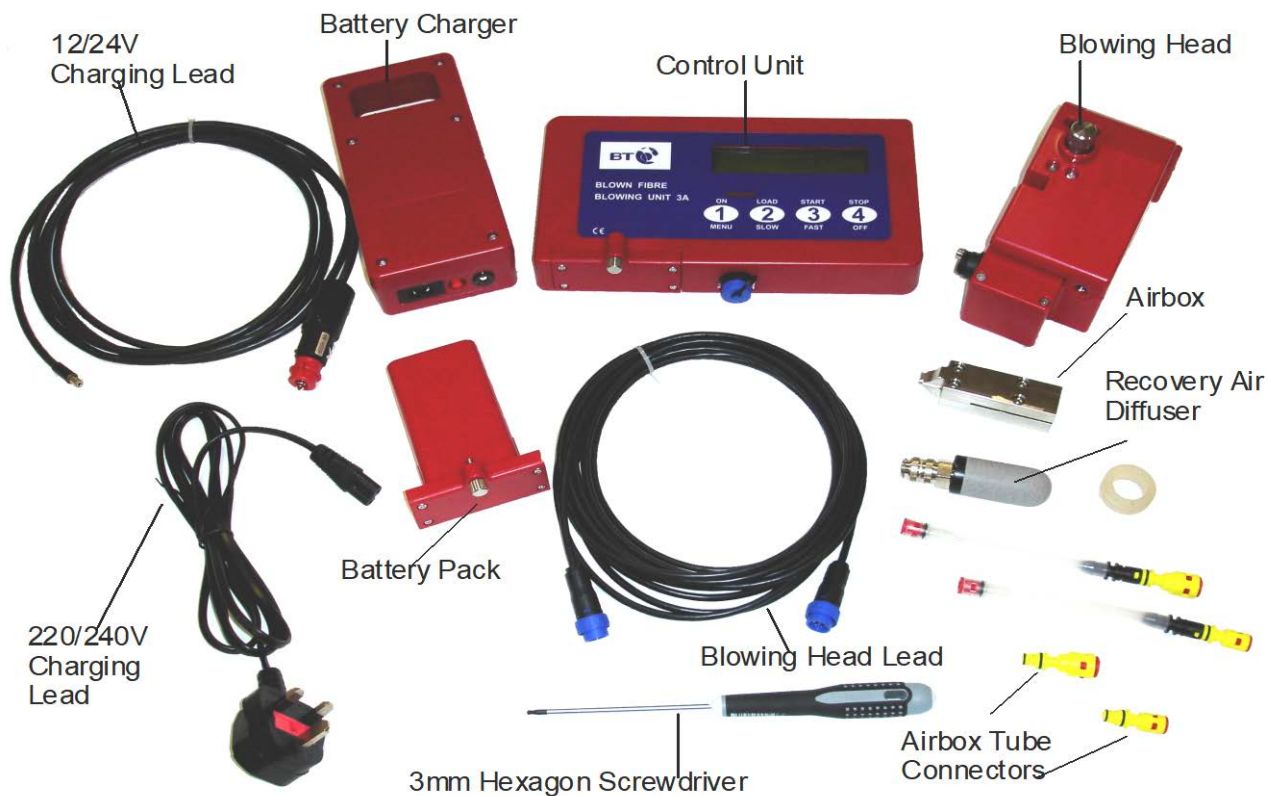

4A Blowing Head mounted on dispenser.